

QFIII Hybrid Attachments

Hybrid Pipe Tool Solutions

The economical and time saving QFIII platform that allows for expanded pipe fitting capabilities like never before.




1 Hybrid
More Than 1 Tool & Size

QFIII Attachments

Push & Pull

Pipe & Fitting Adjustment

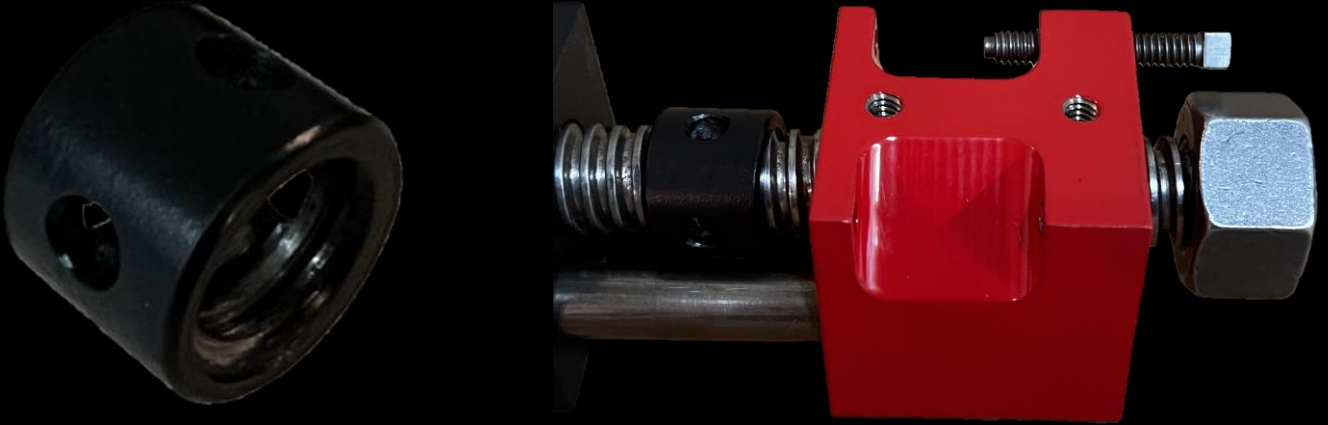

Inside Positioning Nut

The addition of an Inside Positioning Nut provides for the ability to quickly adjust pipe spacing, boiler tubes, interconnects, etc. Eliminating the need for not only rigging and re-rigging but the come alongs and slings to do it and the time.

Inside Positioning Nut

Specs

Thread On Installation

Force:	4 ton (8000 lbs)
Stroke	1.5in per Nut



QFIII Attachments

Fittings

Hold, Align & Position



Fitting Saddle

The Fitting Saddle was developed to provide users an extra set of hands. The bolt on attachment provides a single user to hold, align and position fittings in seconds, without the need for pipestands, extra hands, or any other tools or gear.

Fitting Saddle

Specs

Single Bolt Installation

Saddle Weight: 9oz (approx)

Jackscrews: 4oz each (approx)

Size Range: 2 to 10in Fittings



QFIII Attachments

Flanges

Hold, Align & Position



Flange Arm


The QFIII Flange Arm was developed as another user-friendly simple attachment, that makes quick work of fitting flanges in the field and on jobsites. Designed to allow a single user the ability to hold, align & position flanges up to 10in efficiently and with ease.

Flange Arm

Specs

2 Bolt Installation

Arm Assy Weight:	3lbs (approx)
Vertical Stroke:	5 inches
Arm Pivot:	20 Degrees
2 Hole Pins:	1.5lbs each (approx)
Pin Size Range:	1/2in to 1 3/8 in
Load Rating:	500lbs (10in, Class 1500 = 462lbs)

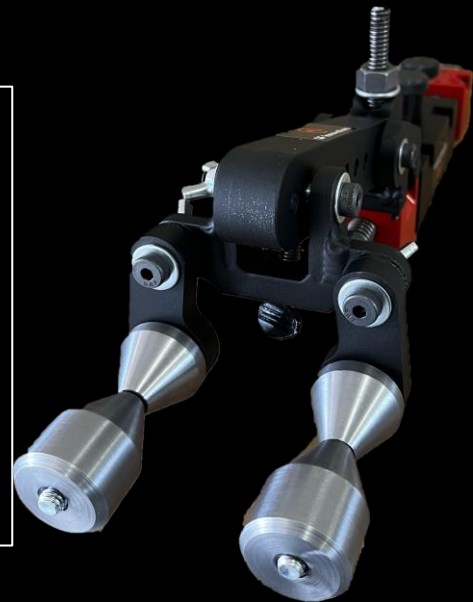

QFIII Attachments
QFIII Hybrid-SP



**Take All The
Tools & Sizes Anywhere**